



**BOYER BRANDSDEN  
ELECTRONICS LIMITED**

Frindsbury House, Cox Street, Detling  
Maidstone, Kent ME14 3HE

Telephone: 01622 730939

Facsimile: 01622 730930

Website: [www.BoyerBrandsden.com](http://www.BoyerBrandsden.com)

Email: [Mail@BoyerBrandsden.com](mailto:Mail@BoyerBrandsden.com)

**P.V.L. IGNITION COILS**

H.T. OUTPUT  
INTERNAL DIAMETER 8.2mm


L.T. INPUT +/-  
M5 THREADS  
(with nuts & 2 male spade  
connectors)

OVERALL DIAMETER  
45mm

OVERALL LENGTH  
113mm

BODY LENGTH  
(to flange) 86 mm

WEIGHT: 300g.  
(approx.)

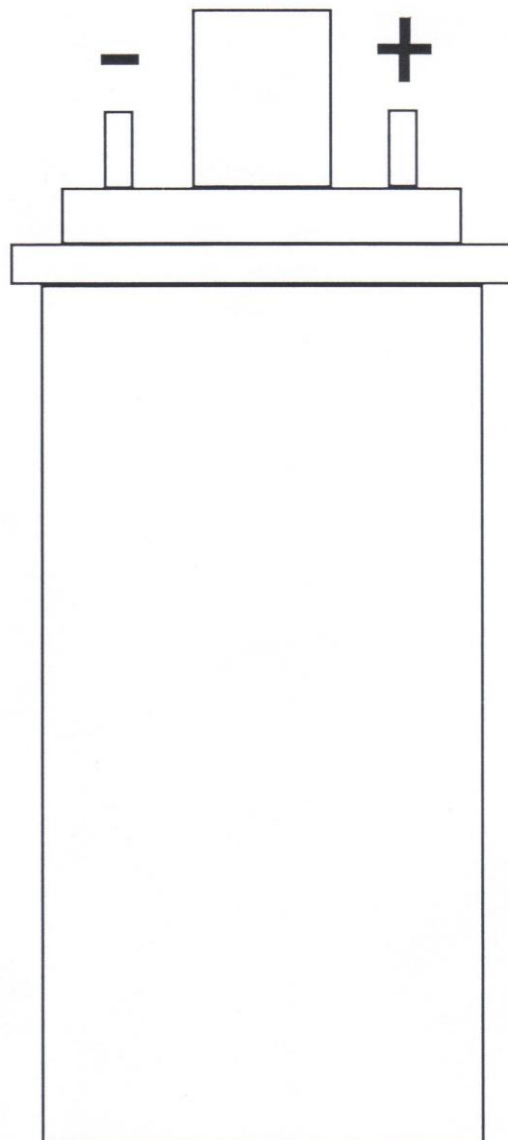

DIAMETER 40mm

COIL00003

6 VOLT SINGLE LUCAS 17P6  
SIZE REPLACEMENT.

PRIMARY: 2.0 ohms  
SECONDARY: 7 Kohms

COIL00005

12 VOLT SINGLE LUCAS 17P12  
SIZE REPLACEMENT.

PRIMARY: 4.0 ohms  
SECONDARY: 7 Kohms

**Boyer Brandsden Ignitions**

*Electrifying Performance*

Registered Office:  
Frindsbury House, Cox Street,  
Detling, Maidstone, Kent ME14 3HE.  
Registered Number: 1087017